



TECHNICAL DATA SHEET

LANDORA TEAK OIL

Penetrating teak oil for untreated or previously treated teak and other hardwood. Landora Teak Oil is water repellent and protects against cracking, UV radiation and dulling as well as it preserves and accentuates the natural sheen of the wood. It is most suitable for outdoor furniture and doors.

Contains drying oils. There is a risk of spontaneous combustion of any rags or cotton waste, etc. Contaminated rags, cotton waste, etc., must be kept in water or be incinerated.

Directions for use

1. Make sure the surface is solid, dry and well cleaned.
2. Apply Landora Teak Oil generously with a brush or cloth.
If using a spray can: Shake the can thoroughly, spray on and even out using a cloth.
3. Important: Wipe off any excess oil with a clean cloth after approx. 15 minutes.

The master painter suggests: For the best results on teak outdoors, perform the treatment once yearly.

Technical data:

Consumption: approx. 8-10 m²/litre.

Drying time: at least 24 hours.

Application: Brush, cloth or spray gun.

Cleaning of tools: Landora Brush Cleaner or soap and water.

VOC limit value (Cat A/f): 130 g/l (2010).

Product VOC: < 130 g/l.


Water based

TO BE STORED AWAY FROM FROST

KEEP OUT OF REACH OF CHILDREN

The product is available in the following amounts:

0.75L

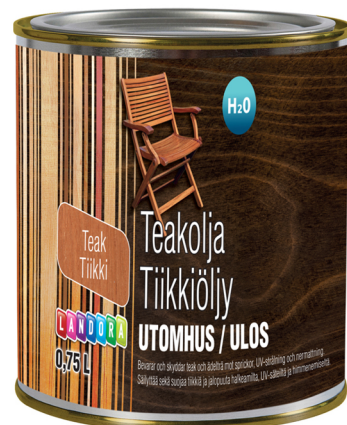

Produced for the Landora brand.

Manufacturer: Hagmans Nordic AB, SE-511 10 Fritsla, Sweden.

Contact: +46-320-189 00

landora.com